


CABLE LENGTH TABLE	
FINISHED LENGTH ± 2% TOTAL	
MARK PART NO	'L'
3004-345-0.5M	0.5M (1.6 FT)
3004-345-1M	1M (3.28 FT)
3004-345-5M	5M (16.4 FT)

REVISIONS				
ECO	REV	DESCRIPTION	DATE	APPROVED
7486	A	INITIAL RELEASE	10/5/16	J KORDIK
7520	B	DOCUMENT CORRECTION	10/12/16	J Georgiana
7525	C	D-CODED, NOT S-CODED	10/18/16	J KORDIK
8518	D	48VAC,60VDC,-20TO80,AWG26	7/30/20A.N	L. LIU

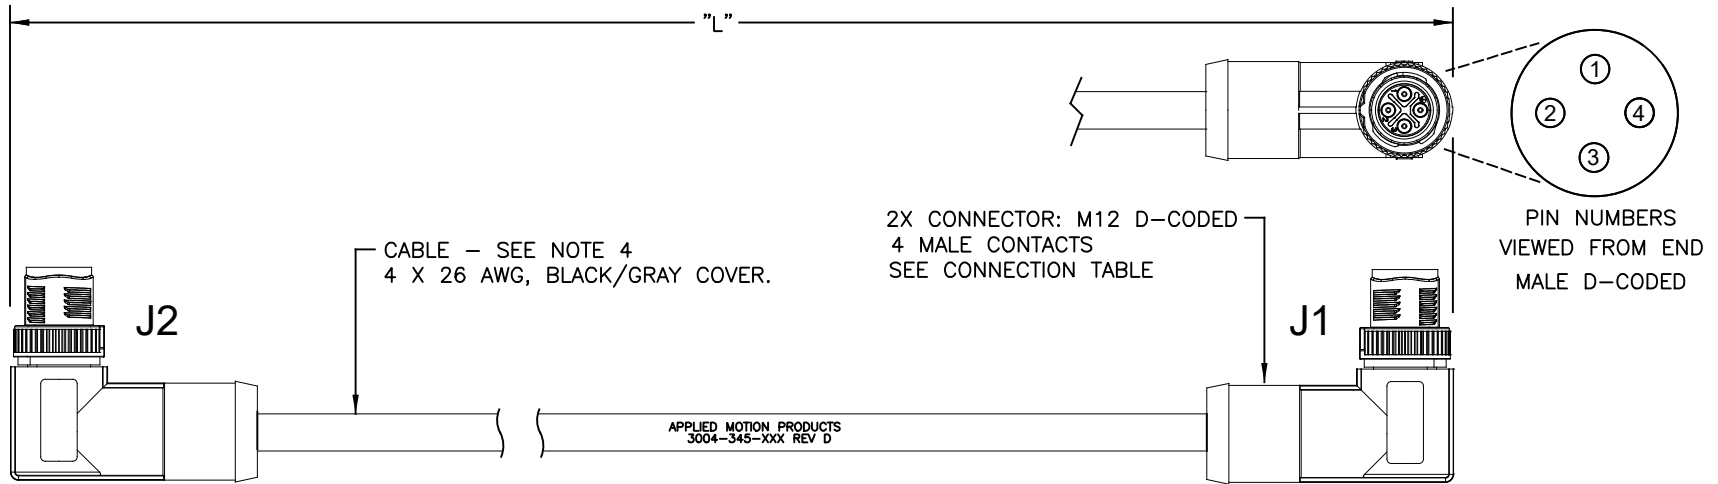

NOTES: UNLESS OTHERWISE SPECIFIED

- THIS CABLE IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EU RoHS DIRECTIVE.
- REFER TO CONNECTION CHART FOR ASSOCIATED CONNECTOR PINS.
- CURRENT RATING: 2A, 48 VAC, 60 VDC. RATING: IP65. TEMPERATURE RANGE: -20°C TO +80°C,
- CABLES SUPPLIED BY PHOENIX CONTACT: 0.5M=1408699/93E/0.500, 1M=1408699/93E/1.000, AND 5M=1408699/93E/5.000.

TOLERANCES		THIRD ANGLE PROJECTION		APPLIED MOTION PRODUCTS, INC.	
DECIMALS: MM X.XXX = ±0.013 X.XX = ±0.25 X.X = ±2.5 ANGLES: MACH. = ±5° CHAM. = ±5°					
		APPROVALS	DATE	<b>CORD SET - RIGHT ANGLE M12 - ETHERNET DAISY CHAIN</b>	
		DRAWN <i>R.JONEZ</i>	8/4/16		
		CHECKED <i>K.KESLER</i>	7/30/20		
		APPROVED		B	DWG NO. 3004-345-XXX
					REV D
		SCALE: NTS		SHEET 1 OF 1	